


DEFENSE-LINK[®]

Shipboard LSC5POS-4

PROPRIETARY INFORMATION, DO NOT REPRODUCE WITHOUT WRITTEN APPROVAL FROM MARMON AEROSPACE & DEFENSE.
 Information contained in this drawing may be subject to United States export control laws and regulations, such as the U.S. International Traffic in Arms Regulations or the Export Administration Act.

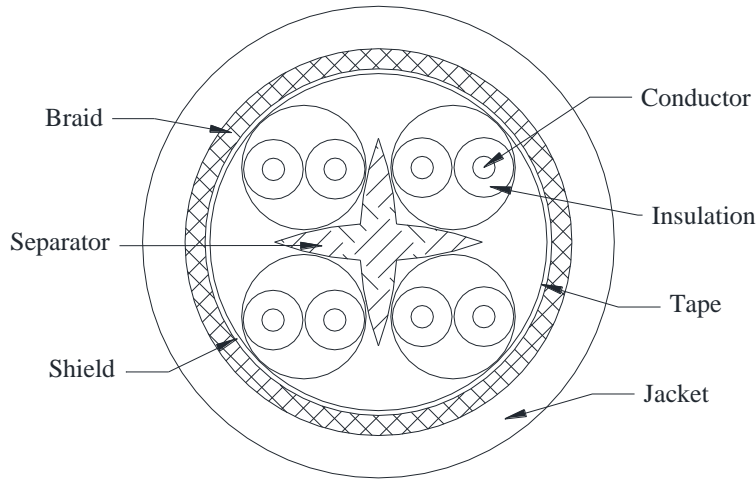

1. Construction:

- 1.1. Conductors: 24 AWG Stranded Tinned Copper
- 1.2. Insulation: Polyethylene Nominal Diameter 0.041"
- 1.3. Pair Assembly: Conductors Twisted to Varying Lays
- 1.4. Cable Assembly: 4 Pairs Cabled With Separator
- 1.5. Tape: Polypropylene 25% Overlap
- 1.6. Shield: Aluminum/Polyester
- 1.7. Braid: 36 AWG Tinned Copper
- 1.8. Jacket: LSZH XLPO Nominal OD = 0.330"

1.9. JACKET PRINT:

MARMON AEROSPACE & DEFENSE LSC5POS-4
 M24643/61-02UD XLPOLYO YYYY

YYYY = Year of Manufacture

2. Physical Characteristics:


- 2.1. Nominal Cable Weight: 59.0lbs./1,000 ft.

3. Compliance:

- 3.1. Acid Gas Generation: MIL-DTL M24643C (4.8.23)
- 3.2. Halogen Content: MIL-DTL M24643C (4.8.23)
- 3.3. NES 713 Toxicity: MIL-DTL M24643C (4.8.27)
- 3.4. Flame Propagation: MIL-DTL M24643C (4.8.13)
- 3.5. Jacket Immersions: MIL-DTL M24643C (4.8.26)
- 3.6. Jacket Tear: MIL-DTL M24643C (4.8.20)
- 3.7. Heat Distortion: MIL-DTL M24643C (4.8.15)
- 3.8. Weathering: MIL-DTL M24643C (4.8.28)
- 3.9. QPL Approved: Ser. 05S/2017-354

4. Category Electrical Performance:

- 4.1. Voltage Rating: 300 V
- 4.2. Max. DC Resistance: 9.38 Ω/100m
- 4.3. Max DC Resistance Unbalance: 5.0%
- 4.4. Nominal Velocity of Propagation: 68%
- 4.5. Max Propagation Delay Skew: 45 ns/100m

TITLE:		DESCRIPTION:			Marmon Aerospace & Defense 680 Hayward Street Manchester NH 03103 Phone: 603-622-3500		 <i>Mission Critical Connectivity Systems</i>
LSC5POS-4		4 Pair 24 AWG Stranded Tinned Copper Category 5e Shielded Shipboard M24643/61					
Rev	Date	Detail			Eng.	App.	
6	1-7-2020	Updating form			Kevin C	Kyle Coderre	
5	1/7/20	Updating Print Legend			KB	WC	
4	12/20/18	Change logo and basic corrections			SM	WC	
3	04/27/18	Update to Tinned Copper			PB	WC	ECN 18-052
2	02/02/18	Updated QPL Approval Ser number			WC	RN	
1	11/29/16	First Release			BAL	RN	

Marmon-AD reserves the right to change the information above without prior notification. Marmon assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document
 All materials used are Low Smoke Zero Halogen and meet Rohs and Reach requirements for materials.

DEFENSE-LINK[®]

Shipboard LSC5POS-4

PROPRIETARY INFORMATION, DO NOT REPRODUCE WITHOUT WRITTEN APPROVAL FROM MARMON AEROSPACE & DEFENSE.
 Information contained in this drawing may be subject to United States export control laws and regulations, such as the U.S. International Traffic in Arms Regulations or the Export Administration Act.


Category 5e Electricals

(Per ANSI/TIA 568-C.2)

	Return Loss	Attenuation	NEXT	PSNEXT	ACRF	PSACRF
Freq.	(dB)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)
(MHz)	(Min)	(Max)	(Min)	(Min)	(Min)	(Min)
1	20	2.4	65.3	62.3	63.8	60.8
4	23	4.9	56.3	53.3	51.7	48.7
8	24.5	6.9	51.8	48.8	45.7	42.7
10	25	7.8	50.3	47.3	43.8	40.8
16	25	9.9	47.3	44.3	39.7	36.7
20	25	11.1	45.8	42.8	37.7	34.7
25	24.2	12.5	44.3	41.3	35.8	32.8
31.25	23.3	14	42.9	39.9	33.9	30.9
62.5	21.7	20.4	38.4	35.4	27.8	24.8
100	19.0	26.4	35.3	32.3	23.8	20.8

Category Color Code

Color Code	
Pair 1	Blue-White/Blue
Pair 2	Orange-White/Orange
Pair 3	Green-White/Green
Pair 4	Brown-White/Brown

TITLE:		DESCRIPTION:		Marmon Aerospace & Defense 680 Hayward Street Manchester NH 03103 Phone: 603-622-3500		 <i>Mission Critical Connectivity Systems</i>
LSC5POS-4		4 Pair 24 AWG Stranded Tinned Copper Category 5e Shielded Shipboard M24643/61				
Rev	Date	Detail		Eng.	App.	
6	1-7-2020	Updating form		Kevin C	Kyle Coderre	
5	1/7/20	Updating Print Legend		KB	WC	
4	12/20/18	Change logo and basic corrections		SM	WC	
3	04/27/18	Update to Tinned Copper		PB	WC	ECN 18-052
2	02/02/18	Updated QPL Approval Ser number		WC	RN	
1	11/29/16	First Release		BAL	RN	

Marmon-AD reserves the right to change the information above without prior notification. Marmon assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document
 All materials used are Low Smoke Zero Halogen and meet Rohs and Reach requirements for materials.