


DEFENSE-LINK[®]

Shipboard LSC5POSR-4

PROPRIETARY INFORMATION, DO NOT REPRODUCE WITHOUT WRITTEN APPROVAL FROM MARMON AEROSPACE & DEFENSE.

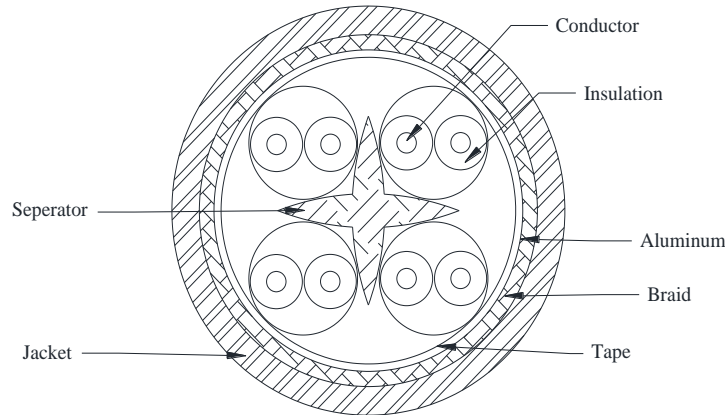

1. Construction:

- 1.1. Conductors: 26 AWG Stranded Tinned Copper
- 1.2. Insulation: Polyethylene, 0.035" Nominal Diameter
- 1.3. Pair Assembly: Conductors Twisted to Varying Lays
- 1.4. Cable Assembly: 4 Pairs Cabled with Separator
- 1.5. Tape: Foamed High-Density Polyethylene
- 1.6. Shield: Aluminum/Polyester
- 1.7. Braid: 36 AWG Tinned Copper
- 1.8. Jacket: LSZH XLPO, 0.300" Nominal Diameter

1.9. JACKET PRINT:

MARMON AEROSPACE & DEFENSE LSC5POSR-4
M24643/61-03UO XLPOLYO YYYY

YYYY = Year of Manufacture

2. Physical Characteristics:


- 2.1. Nominal Cable Weight: 50 lbs. /1,000 ft.

3. Compliance:

- 3.1. Acid Gas Generation: MIL-DTL M24643C (4.8.23)
- 3.2. Halogen Content: MIL-DTL M24643C (4.8.23)
- 3.3. NES 713 Toxicity: MIL-DTL M24643C (4.8.27)
- 3.4. Flame Propagation: MIL-DTL M24643C (4.8.13)
- 3.5. Jacket Immersions: MIL-DTL M24643C (4.8.26)
- 3.6. Jacket Tear: MIL-DTL M24643C (4.8.20)
- 3.7. Heat Distortion: MIL-DTL M24643C (4.8.15)
- 3.8. Weathering: MIL-DTL M24643C (4.8.28)
- 3.9. Water Tightness: MIL-DTL M24643C (4.8.22)
- 3.9. QPL Approved: Ser. 05S/2017-354

4. Category Electrical Performance:

- 4.1. Voltage Rating: 300 V
- 4.2. Max. DC Resistance: 14 Ω/100m
- 4.3. Max DC Resistance Unbalance: 5.0%
- 4.4. Nominal Velocity of Propagation: 67%
- 4.5. Max Propagation Delay Skew: 45 ns/100m

TITLE:		DESCRIPTION:			Marmon		 <i>Mission Critical Connectivity Systems</i>	
LSC5POSR-4		4 Pair 26 AWG Stranded Tinned Copper Category 5e Shielded Shipboard LSC5POSR-4			Aerospace & Defense 680 Hayward Street Manchester NH 03103 Phone: 603-622-3500			
Rev	Date	Detail			Eng.	App.		
2	1/30/20	Update Form			KDC	KWC		
1	1/20/20	Initial Entry			KB	WC	Q16692	

Marmon-AD reserves the right to change the information above without prior notification. Marmon assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document
All materials used are Low Smoke Zero Halogen and meet Rohs and Reach requirements for materials.

DEFENSE-LINK[®]

Shipboard LSC5POSR-4

PROPRIETARY INFORMATION, DO NOT REPRODUCE WITHOUT WRITTEN APPROVAL FROM MARMON AEROSPACE & DEFENSE.


Category 5e Electricals

(Per ANSI/TIA 568-C.2)

Freq.	Return Loss	Attenuation	NEXT	PSNEXT	ACRF	PSACRF
	(dB)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)	(dB/100m)
(MHz)	(Min)	(Max)	(Min)	(Min)	(Min)	(Min)
1	20	2	65.3	62.3	63.8	60.8
4	23	4.1	56.3	53.3	51.7	48.7
8	24.5	5.8	51.8	48.8	45.7	42.7
10	25	6.5	50.3	47.3	43.8	40.8
16	25	8.2	47.3	44.3	39.7	36.7
20	25	9.3	45.8	42.8	37.7	34.7
25	24.3	10.4	44.3	41.3	35.8	32.8
31.25	23.6	11.7	42.9	39.9	33.9	30.9
62.5	21.5	17	38.4	35.4	27.8	24.8
100	20.1	22	35.3	32.3	23.8	20.8

Category Color Code

Color Code	
Pair 1	Blue-White/Blue
Pair 2	Orange-White/Orange
Pair 3	Green-White/Green
Pair 4	Brown-White/Brown

TITLE:		DESCRIPTION:		Marmon Aerospace & Defense 680 Hayward Street Manchester NH 03103 Phone: 603-622-3500		 <i>Mission Critical Connectivity Systems</i>
LSC5POSR-4		4 Pair 26 AWG Stranded Tinned Copper Category 5e Shielded Shipboard LSC5POSR-4				
Rev	Date	Detail		Eng.	App.	
2	1/30/20	Update Form		KDC	KWC	
1	1/20/20	Initial Entry		KB	WC	Q16692

Marmon-AD reserves the right to change the information above without prior notification. Marmon assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document. All materials used are Low Smoke Zero Halogen and meet Rohs and Reach requirements for materials.