


Guide Dimensions

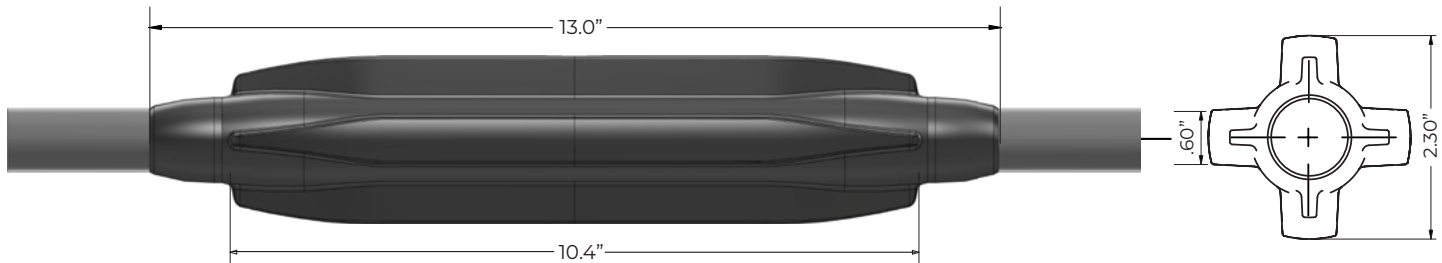

2-7/8" Straight Vane Guide available for the following sucker rod configurations:

Dimensions

Guide Size	Guide Length	Outer Diameter	Vane Width	Rod Sizes
2-7/8"	13.0 inch	2.30 inch	0.60 inch	1", 7/8", 3/4"

Technical Data

Tubing Size	Rod Specification	Coupling Type	EWV (cm ³)
2-7/8"	1" Rod x 1" Pin	1" SH	46.95
	7/8" Rod x 7/8" Pin	7/8" FS	80.43
	3/4" Rod x 3/4" Pin	3/4" FS	115.08

Material Data

Guide Properties	PK - Polyketone	PPS - Polyphenylene Sulfide
Color	Black	Black
Max. Service Temperature	240°F	400°F
Glass Fiber Content	10%	30%

Guide Benefits

- ➔ CFD optimized geometry to minimize turbulence and friction losses (comparative CFD results available upon request).
- ➔ Patented 2-piece mold design for maximum rod body adhesion while remaining flexible to reduce rod fatigue.
- ➔ Extended overall length for maximum durability and rod string stability in rod buckling conditions.
- ➔ Largest erodible wear volume of any rod guide in its class.
- ➔ Proudly manufactured in Texas, USA.