



WASTE COOKING OIL CONTAINMENT TANK

MODEL 4280-NA-0

CONSTRUCTION AND FEATURES

- Heavy-gauge aluminum exterior
- Outdoor configuration; tank insulated to withstand extreme temperatures
- Freestanding, 43 in. (1092 mm) diameter x 80 in. (2032 mm) height
- Tank capacity 2650 lb/353 Gal (1202 kg/1336.3 l)
- Remote located control panel with power indication
- Level indicators with safety overflow protection
- UL, UL Sanitation Listed (U.S. and Canada)
- Suitable for Direct-Plumbed®, Remote-Plumbed® or Caddy systems
- Easy to access and service components
- One-year warranty on all parts and components
- Worldwide delivery and installation available
- Immersion heater maintains contents in liquid form

BENEFITS

- Minimal or no handling of hot waste shortening
- Insurance and Workers' Comp savings
- Less employee downtime
- Labor savings and greater employee safety
- Cleaner grounds and image
- Waste oil of higher value to collection companies
- Avoid pollution fines



Remote-located control panel



Installation and Operating Specifications

Model	4280-NA-0 Containment Tank
Power Requirements	110 V 15 A - 250 V 3.5 A, 50/60 Hz
Installation Space Requirements	43 in. l x 43 in. w x 81 in. h (1092 mm x 1092 mm x 2057 mm)
Shortening Capacity	2650 lb/353 Gal (1202 kg/1336.3 l)
Shipping Weight	460 lb (209 kg), tank only on pallet
Documentation	Installation guide, Operating guide
Warranty	One-year parts and labor



Frontline International, Inc.



187 Ascot Parkway • Cuyahoga Falls, Ohio 44223
330-861-1100 • 877-776-1100 • frontlineii.com
Fax: 330-861-1105 • info@frontlineii.com

FRONTLINE
international

© Frontline International, 10/16

WASTE COOKING OIL CONTAINMENT TANK

MODEL 4280-NA-0

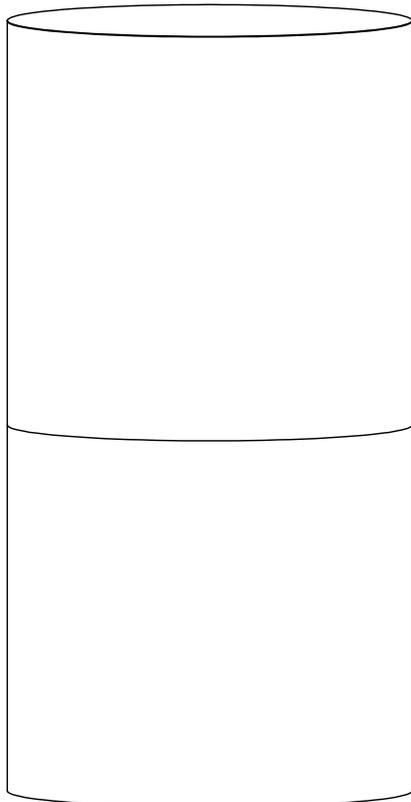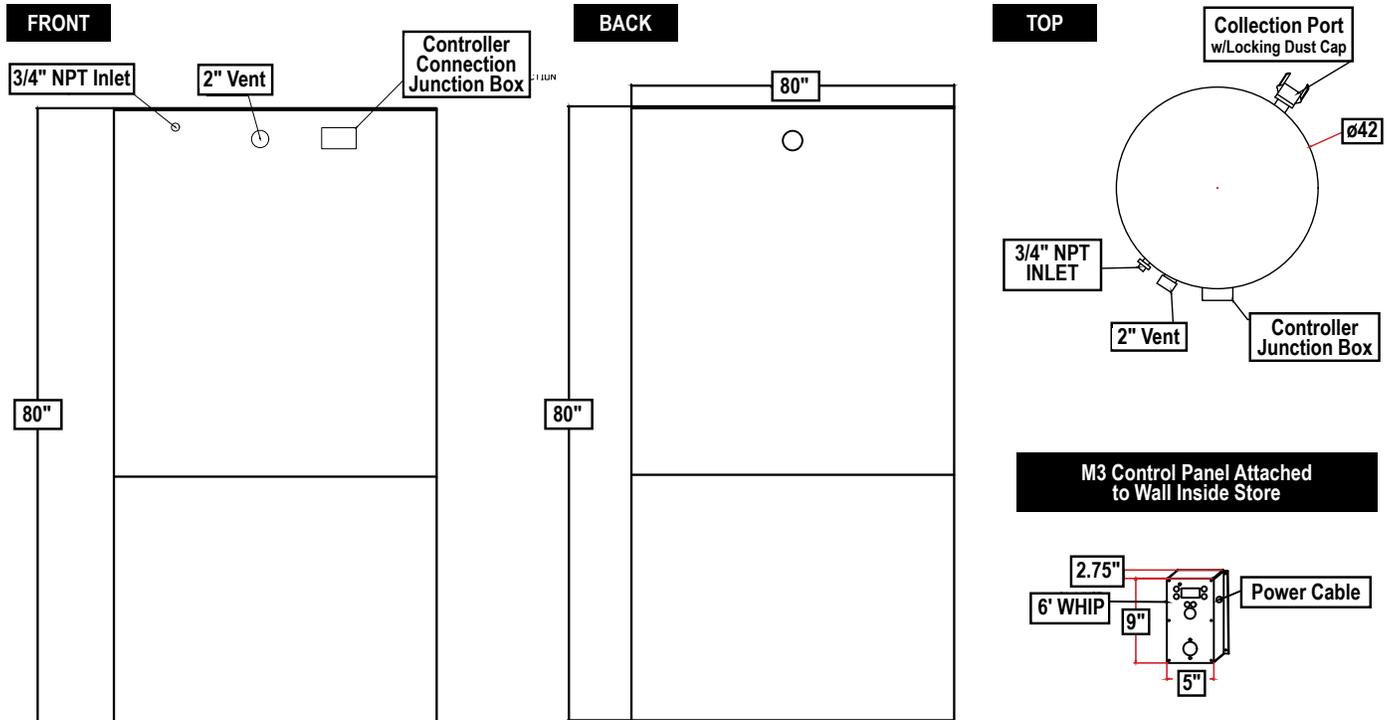

IMPORTANT

- The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- Children should be supervised to ensure that they do not play with the appliance.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Not intended to be operated by means of an external timer or a separate remote-control system.
- This appliance is intended to be used in commercial kitchen applications.

Frontline International, Inc.

187 Ascot Parkway • Cuyahoga Falls, Ohio 44223
330-861-1100 • 877-776-1100 • frontlineii.com
Fax: 330-861-1105 • info@frontlineii.com

FRONTLINE
international

© Frontline International, 10/16